


Applications

Illumination Of The Facade Of Building, Billboards
Parking Places, Grass Lands And Sculptures.

Photometric Data














Philips
Lumileds SMD3030
140 lm/w
≥70
<15%
30°/60°/90°/TYPE /TYPE /TYPE V
- 40°C ~ +50°C
-40℃~+65℃
IP66
AC 100~277V
50 / 60Hz
Meanwell / Sosen
≥0.95
≥50,000 HRS
Aluminum Alloy
15% ~ 90% RH

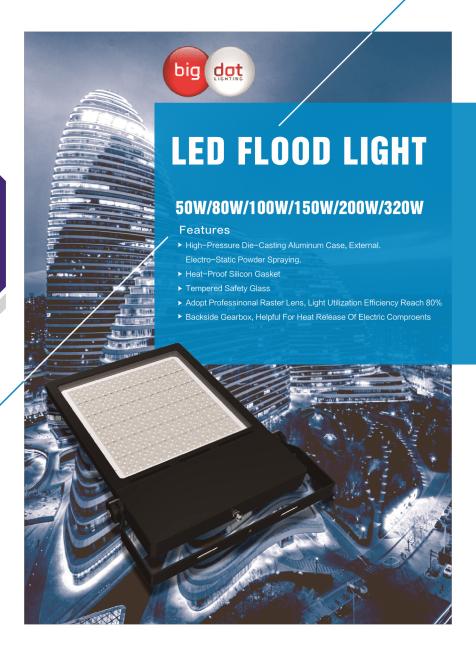

LED FLOOD LIGHT