

LINEAR HIGH BAY




Best Choice For Replacement Metal Halide Equivalent




Product Details

- ▶ Aluminium housing and high quality polycarbonate lens
- ▶ Suspension kit and conduit mounting bracket available
- ▶ Replacement 320W – 1000W Metal Halide Equivalent
- ▶ Premium 150 lm/w
- ▶ Meanwell/Sosen/Moso driver for options 100 – 277 VAC/200 – 480VAC, 5 year warranty
- ▶ Intelligent Lighting: Zigbee wireless control, daylight sensor dimming, Microwave sensor dimming, 0 – 10V Dimming

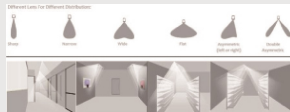

Applications

LED linear high bay lights are designed to work well in high ceiling applications such as warehouses, factories, supermarkets, gymnasiums, retail stores, and other commercial and industrial spaces. These lights are capable of working in damp conditions and are designed to last up to 50,000 hours.

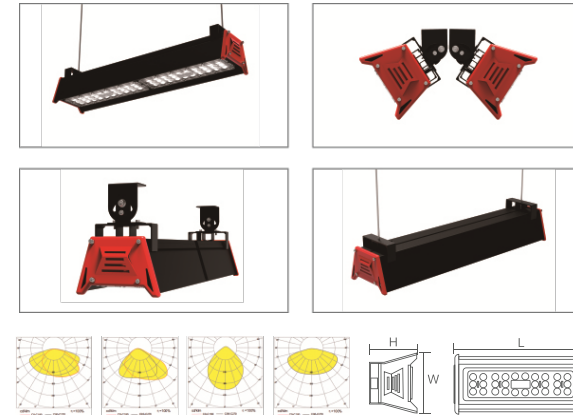

Unit, mm

SIZE	L	W	H	POWER	NW	GW	CS
A	300	140	120	50W	1.9KG	2.4KG	450*210*150mm
B	600	140	120	100W	2.4KG	4.5KG	750*210*150mm
C	900	140	120	150W	4.6KG	5.6KG	850*210*150mm
D	1200	140	120	200W	6.1KG	7.2KG	1340*210*150mm

Specifications

Model NO.	KH-C-50W	KH-C-100W	KH-C-150W	KH-C-200W
Wattage	50W	100W	150W(120W)	200W(180W)
LED Type	Lumileds SMD3030			
Power Supply(Brand)	Meanwell / Sosen / Moso			
Input Voltage	AC100 – 277V / AC200 – 480V			
Power Frequency	50 / 60Hz			
Output Voltage	DC48V			
Lumen Efficiency	150 lm/w	150 lm/w	150 lm/w	150 lm/w
CRI	80Ra			
Available Beam Angle	120°/ 90°/ 45°/ 30°90°/ 2°30°90°(Double Asymmetric)			
Power Factor	>0.93			
Power Efficiency	>93%			
Fixture Material	Aluminum			
Life Span	>50,000 HRS			
Working Temperature	-40°C – +50°C			
Storing Temperature	-40°C – +65°C			
IP Rated	IP65			
CCT	3000K / 4000K / 5000K / 5700K / 6500K			