

## LINEAR STRIP GEN 2

### Product Description

The Etherium LED Linear Strip provides industry-leading performance paired with high efficacy and dimming/control capabilities. The low profile design allows for quick installation. Rated at over 130 LPW, and backed by industry leading 7 year warranty.



FEATURES	
4ft	8ft
25W/ 40W	65W
4000K / 5000K	
Efficacy up to 130 LPW	
7 Year Warranty	
0 – 10V Dimming	
Rated Life 75,000 hours	
Operating Temperature -20°C to 40°C	

### Construction & Installation

Etherium Linear Strip features a distinct white matte finish with a well constructed diffuser with no additional frame needed. Quick installation with back housing that includes holes and slots for different mounting options. Easy to daisy chain from one fixture to another.

### Electrical & Operations

Our Linear Strip series is universal voltage (120-277v) with a reliable driver equipped with 0-10V dimming capability. Can operate in temperatures -20°C to 40°C. Fixture utilizes high-efficacy LED packages to maintain overall cool fixture temperatures.

### Applications

A wide variety of utility applications including parking garage, warehouses, large retail stores, offices storage units, restrooms and stairwells.

### Certification

UL Listed. All components have UL certification. UL Class 2. Driver: SCP, OTP, OVP protection, FCC Part 15 Class B, UL8750 Class 2. DLC Premium

### Warranty

7 year warranty with a 75,000 hour rated L70. See warranty documentation for more detail information



## ORDERING INFORMATION


Example : ETH-LS-4-25W-4K

Nomenclature	Series	Form	Wattage	Color Temp.
<b>ETH</b>	<b>LS</b>	<b>4</b>	<b>25W</b>	<b>4K</b>
ETH = Etherium	LS = Linear Strip Series	4 = 4 feet 8 = 8 feet	25W = 25 Watts 40W = 40 Watts 65W = 65 Watts	4K = 4000K 5K = 5000K

\*\*\*Specifications and Dimensions subject to change without notice\*\*\*

SPECIFICATION	
PERFORMANCE SUMMARY	
Input Voltage	120V-277V
Input Frequency	50/60 Hz
Wattage	See Performance table
Lumens	See Performance Table
Efficacy	>130 LPW
CRI	83+
CCT	4000K / 5000K
Rated Life	75,000 Hr
L70	>72,000 Hr
Power Factor	>0.9
THD	<15%
Dimming	0-10V
Operating Temp.	-20°C to 40°C

## DIMENSIONS

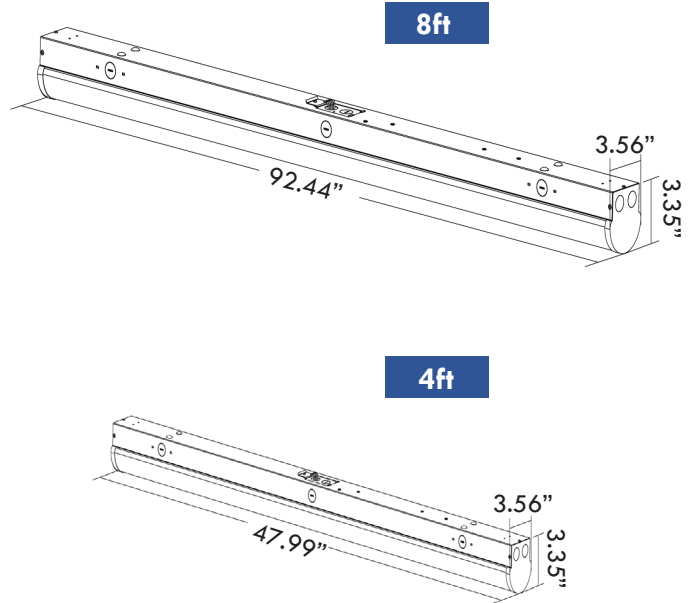

CARTON DIMENSIONS AND WEIGHT			
Model	Carton	Weight	PCS/BOX
4ft	50"x3.75"x3.75"	6 LBS	1 pcs
8ft	98"x3.75"x3.75"	15 LBS	1 pcs

PERFORMANCE DETAILS				4000K		5000K	
Form Factor	Catalog No.	Rated Wattage	Tested Wattage	Total Lumens	Efficacy LPW	Total Lumens	Efficacy LPW
4ft	ETH-LS-4-25W	25W	25W	3325 lm	133	3350 lm	134
4ft	ETH-LS-4-40W	40W	40W	5240 lm	131	5280 lm	132
8ft	ETH-LS-8-65W	65W	65W	8580 lm	132	8645 lm	133

\*\*\*Specifications and Dimensions subject to change without notice\*\*\*